

# 1834 PC PROGRAMMABLE



# TELEPHONE ENTRY SYSTEM



flush mount  
shown with trim ring -  
sold separately



surface mount



wall mount



**big characters**  
half inch LCD display



**stainless steel**  
plate and anti-vandal features  
protects all internal parts



**pc programmable**  
easy to use Remote Account  
Manager software included  
with system



**large scroll**  
and call buttons

- Ideal for applications that do not require card access control or system expansion
- Visitors use the phone system to communicate with a resident who can grant or deny access via their own touch-tone telephone
- PC programmable. Programming and Transaction Analysis software included
- Live Transactions allows you to view activity as it happens directly on your computer display
- Large A and Z scroll buttons and one touch CALL button makes system operation quick and easy
- Prewired for postal switch

FEATURES


## ACCESS CONTROL SOLUTIONS






# 1834 PC PROGRAMMABLE TELEPHONE ENTRY


The Model 1834 is an ideal telephone entry system that is suited for large applications that have a separate access control system, or in applications that require telephone entry access only. Visitors are easily identified by voice communication and can be granted or denied access directly from a touch-tone telephone.

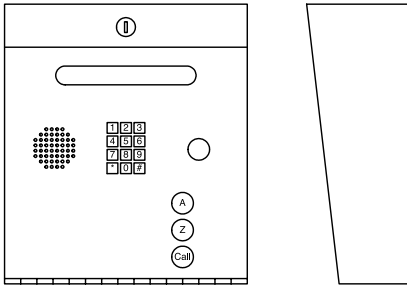

**1834 Surface**  
 11.25" W x 13" H x 4.75" D  
 285mm W x 330mm H x 120.6mm D

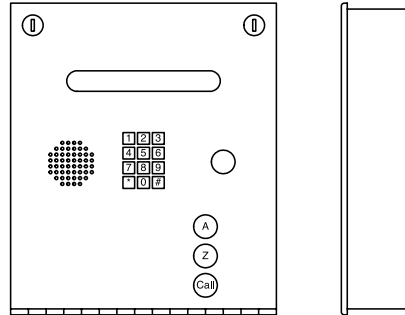

**1834 Flush**  
 12" W x 13.25" H x 3.25" D  
 305mm W x 336.5mm H x 82.5mm D

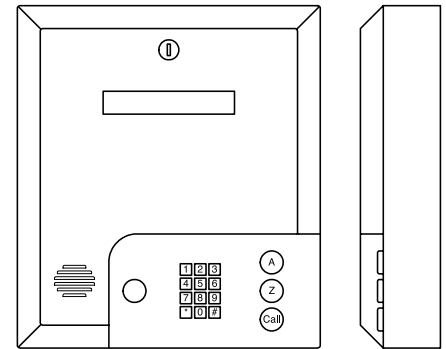

**1834 Wall**  
 13.25" W x 15" H x 3.5" D  
 336.5mm W x 381mm H x 88.9mm D

## 1834 Specs

### Communication

True full duplex  
 Hands free  
 Optional handset (surface or flush mount only) (ADA compliant)

### Display

Single line 20 character super-twist LCD - 1/2 inch characters

### Mounting Styles

Surface, Flush or Wall  
 Flush mount requires flush mounting kit  
 Enclosures are rated NEMA 4x

### Capacity

Max 3000 phone numbers, 255 area codes  
 8000 event transaction memory  
 4 digit entry codes, capacity same as telephone number memory

### Door/gate control

Two doors and/or gates

### Programming Methods

Modem, RS-232, RS-422, Wireless, LAN, WAN, IM Server (some of these methods will incur additional cost for hardware and/or service subscriptions)  
 Other programming methods include system keypad and remotely from a touch tone telephone

### Advanced Features

Full Duplex communication  
 Remote Account Manager software  
 Live Transactions (requires TCP/IP internet connection or RS-232 connection)  
 Database import/export capability using CSV file format  
 Transaction buffer stores last 8000 events  
 Programmable directory codes can be set from 1 to 4 digits in length  
 10 & 11 digit dialing capability  
 Large A and Z scroll and CALL buttons  
 Built in clock/calendar  
 8 hold open time zones  
 Built in postal lock provision, EEPROM memory

### Optional

TCP/IP Network Adapter  
 Wireless Modem  
 RS-232 Connecting Cable  
 Flush Mount Kits  
 CCTV Camera  
 Heater

### Operating Temp

10°F to 145°F  
 -12°C to 62°C  
 Optional heater kit available for colder climates

### Electrical Requirements

16 VAC, 20 VA System power (250ma)  
 two transformers are sent with unit, second transformer for RS232 power  
 U.L. listed power transformers provided  
 Ringer equivalence: 0.0A Jack Type: RJ11C or W

### Safety Standards

FCC (US) DUF6VT-12874-OT-T  
 DOC (CAN) 1736 4528 A  
 Complies with UL 294  
 ETL Listed

### Shipping Weight

Approximately 15-20 lbs (6.8-9 kg)

### Warranty

2 year limited factory warranty

Distributed by:

### DOOR KING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2011 All Rights Reserved. Product specifications may change without notice. Rev. 8/11

### MEMBER:

