

VIKING ACCESS SYSTEMS™

SLEEK AND EFFICIENT SWING GATE AUTOMATION



G-5

RESIDENTIAL AND COMMERCIAL


SWING GATE OPERATOR

CLASS I, CLASS II, CLASS III, AND CLASS IV VEHICULAR GATE OPERATOR



G-5™ PRODUCT INFORMATION AND SPECIFICATIONS

With its compact, low profile design and the power to support 700 lbs of weight along with gate lengths of up to 16 feet, the Viking G-5™ will revolutionize the idea of gate operation. The G-5™ is capable of continuous cycles operation at 24V DC, converted directly from an AC line. The battery back-up provides up to 400 cycles of operation with a maximum capacity gate. This operator is UL Listed 18TC UL325 and UL991.

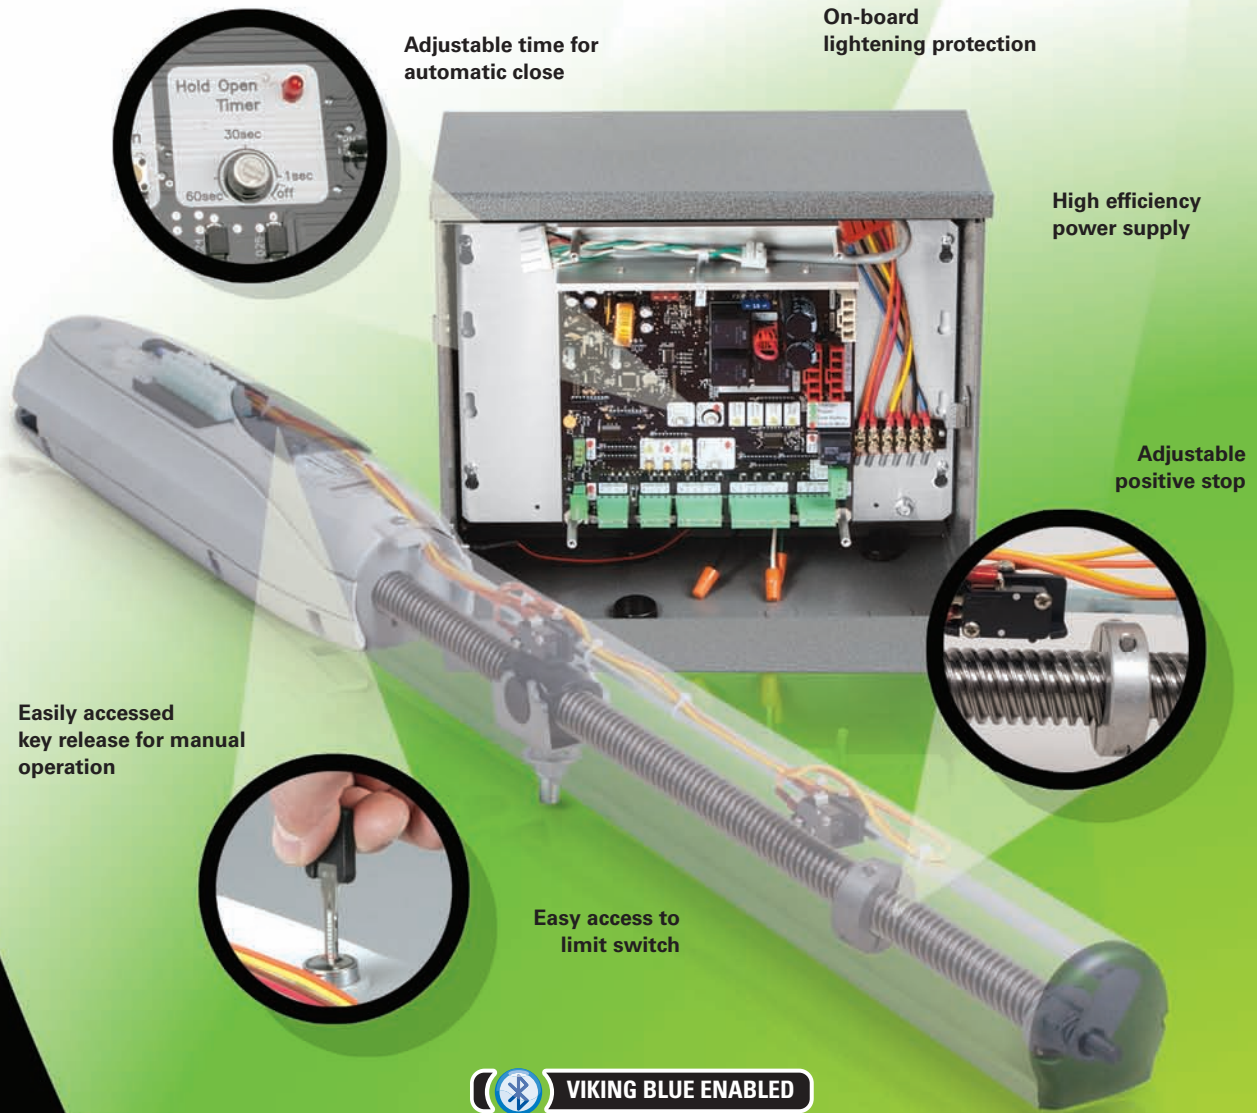

Adjustable time for automatic close

On-board lightning protection

High efficiency power supply

Adjustable positive stop

Easily accessed key release for manual operation

Easy access to limit switch

 **VIKING BLUE ENABLED**

 **SOLAR EFFICIENT OPERATION**



Operational Voltage	... 24 VDC with 1/2 H.P. Motor
Main Power Source	... 120 / 220 VAC Single Phase
Battery	... 7 AmpHr 12 VDC x 2
Max Gate Capacity	... 700 lbs. / 16 feet
Max Operating Speed	... 16-18 seconds per 90°
Battery Backup Operation	... 400 Full Cycles (600 lbs. / 12' gate)
Max Duty Cycle	... 100% Continuous Cycle
Operating Temperature	... - 4° F to + 158° F



3 YEAR RESIDENTIAL / 2 YEAR COMMERCIAL WARRANTY